



A leading company in
4x4 off road parts parts
& accessories.

AIR TOOLS & ACCESSORIES CATALOGUE

AIR BLOW GUN




AIR ACCESSORIES



AIR HORN VALVE



MANIFOLD

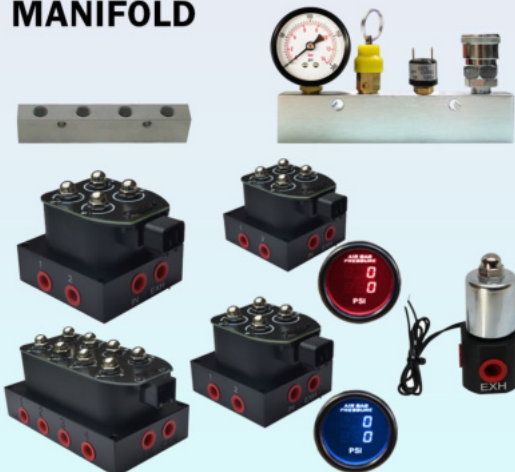

TYRE INFLATOR/DEFLATOR



WWW.AIRONBOARD.COM.AU

1621 Main Road Research VIC 3095 Australia

Contact: aironboard.aust@gmail.com / +61 3 9437 1777

Open: Monday to Thursday 8.00am - 4.00pm

Friday 8.00am - 3.00pm

INDEX

Air Blow Gun	Page 3
Air Accessories	Page 4 - 5
Air Horn Valve	Page 6
Manifold	Page 7 - 12
Tyre Inflator / Deflator	Page 13 - 17

AIR BLOW GUN



2 way Flow Adjustable Air Blow Gun

SKU:
SPECIFICATIONS

- BG001
- Air Inlet: 1/4" NPT
 - Max Pressure: 150 Psi
 - 2-way air inlet connection
 - Aluminum frame for durability
 - Adjustable air control knob
 - Long nozzle for hard to reach areas

PACKAGE

1 x Air Blow Gun Kit

Air Compressor Water Seperator

SKU:
DESCRIPTIONS



- CAWS001
- Constructed from premium aluminum alloy, it is solid, durable, insulation and high temperature resistance, serve you for a long time.
 - This air filter removes the seeper at the lower places of piping automatically, as well as filte moisture and impurities in compressed air.
 - And it can be used to prevent the compressed air being re-polluted by condense water resulting from neglect of manual drain.
 - High filtration accuracy, effective control of air pressure, extend the life of compressors.
 - Compact size, easy to install, suits for various kinds of installation settings.

SPECIFICATIONS

Material: Aluminum Alloy
Interface: 3/8"
Flow: 1500L/min

AIR ACCESSORIES

In-Line Pressure Regulator Kit

**SKU:**

CAPR001

SPECIFICATIONS:

AOB Pressure Regulator Kit, used to regulate air pressure from an air tank to any pressure between 0-220 PSI. This pressure regulator is useful for installations that supply air to locking differentials, & air tools. The regulator also provides an easy-to-read gauge that allows adjustment of inline pressure.

PACKAGE:

1 x 150 PSI Gauge
2 x 3/8 bsp inlet and outlet
1 x mounting bracket

AIR HORN VALVE

12V / 24V Air Horn Electric Solenoid Valve 1/4" NPT Chrome Plated

SKU:

FTV001

SPECIFICATIONS:

- 100% Brand New and High Quality
- Chrome plated all metal housing
- Output Fitting: 1/4" NPT-MALE
- Input Fitting: Compression fitting to fit 1/8" NPT-MALE
- Max air pressure: 120 PSI
- Fit for both 12 volt and 24 volt DC vehicles
- Includes a 1/4" BARB Fitting for 1/4" ID Hose.
- Perfect For Air Ride Systems



PACKAGE:

1 x Air Horn Electric Solenoid Valve
1 x 1/4" Barb adaptor

MANIFOLD



Complete Set Air Manifold with Pressure Switch 70psi ON 100psi OFF

SKU:

MB770

SPECIFICATIONS:

- Made from a solid Aluminum block
- 1 x 1/4 BSP female fitting in each end
- 4 x 1/4 BSP fittings on top
- 0-200 PSI pressure gauge
- 145 PSI pressure relief valve
- 12 volt pressure switch on at 70 psi and off at 100 psi
- Nitto type quick connect coupling

PACKAGE:

Complete Set Air Manifold with Pressure Switch 90psi ON 120psi OFF

SKU:

MB790

SPECIFICATIONS:

- Made from a solid Aluminum block
- 1 x 1/4 BSP female fitting in each end
- 4 x 1/4 BSP fittings on top
- 0-200 PSI pressure gauge
- 145 PSI pressure relief valve
- 12 volt pressure switch on at 90 psi and off at 120 psi
- Nitto type quick connect coupling

PACKAGE:

Complete Set Air Manifold with Pressure Switch 120psi ON 150psi OFF

SKU:

MB7120

SPECIFICATIONS:

- Made from a solid Aluminum block
- 1 x 1/4 BSP female fitting in each end
- 4 x 1/4 BSP fittings on top
- 0-200 PSI pressure gauge
- 175 PSI pressure relief valve
- 12 volt pressure switch on at 120 psi and off at 150 psi
- Nitto type quick connect coupling

PACKAGE:

Complete Set Air Manifold with Pressure Switch 165psi ON 200psi OFF

SKU:

MB7165

SPECIFICATIONS:

- Made from a solid Aluminum block
- 1 x 1/4 BSP female fitting in each end
- 4 x 1/4 BSP fittings on top
- 0-200 PSI pressure gauge
- 212 PSI pressure relief valve
- 12 volt pressure switch on at 165 psi and off at 200 psi
- Nitto type quick connect coupling

PACKAGE:



MANIFOLD



Manifold Bare Block

SKU:	MB700
SPECIFICATIONS:	Made from a solid Aluminum block 1 x 1/4 BSP female fitting in each end 4 x 1/4 BSP fittings on top



Single Solenoid Valve for Air Ride Suspension Manifold Pneumatic Bumper 12V Sensor

SKU:	ABCON1P
SPECIFICATIONS:	•Item Type: Air Ride Suspension •Solenoid Valve •Material: Sealing Material EPDM+ •Aluminum •IN Nozzle Diameter: 1/4 NPT •CV Value: 0.2 Flow •Max Pressure: 200 psi •Leakage Rate: 0 •Response Time: <3ms •Amount Power: 12.6W •Working Voltage: 12V •Minimum Open Circuit Voltage: 8V •Coil Insulation Class: H / 180 C •Ambient Temperature: -40°C- +85°C •Anti Vibration: 10g / 500HZ •Wiring: Common for positive and negative poles
PACKAGE:	1 x Solenoid Valve

Air Ride Suspension Valve Block Solenoid Valve 2 Port Direct Action

SKU:
SPECIFICATIONS:

- ABCON2P
- Item Type: Manifold valve block
 - Material: alloy
 - Color: As pictures shown
 - Total Power: 12.6W
 - Working Voltage: 12V
 - Minimum Open Voltage: 8V
 - Grade of Coil Insulation: H/180 C
 - Ambient Temperature: -40°C - +85°C
 - Test of Fatigue Life: 10 million times
 - Vibration Resistance: 10g/500HZ
 - Working Pressure: 0-200 psi
 - IN PORT: tank air pressure in port 1/4 NPT x 2 (if only 1 required blank the 2nd)
 - OUT PORT: EXHAUST PORT OUT 1/4 NPT x 2 (if only 1 required blank the 2nd)
 - Gauge Pressure Sensor Ports: 2 x 1/8 NPT
 - Airbag Ports: 2 x 1/4 NPT

PACKAGE:

- 1 x Valve Block
- 1 x Harness
- 1 x Mounting Screws
- 1 x Instruction Sheet

Air Ride Suspension Valve Block Solenoid Valve 4 Port Direct Action

SKU:
SPECIFICATIONS:

- ABCON4P
- Item Type: Manifold valve block
 - Material: alloy
 - Color: As pictures shown
 - Total Power: 12.6W
 - Working Voltage: 12V
 - Minimum Open Voltage: 8V
 - Grade of Coil Insulation: H/180 C
 - Ambient Temperature: -40°C - +85°C
 - Test of Fatigue Life: 10 million times
 - Vibration Resistance: 10g/500HZ
 - Working Pressure: 0-200 psi
 - IN PORT: tank air pressure in port 1/4 NPT x 2 (if only 1 required blank the 2nd)
 - OUT PORT: EXHAUST PORT OUT 1/4 NPT x 2 (if only 1 required blank the 2nd)
 - Gauge Pressure Sensor Ports: 4 x 1/8 NPT
 - Airbag Ports: 4 x 1/4 NPT

PACKAGE:

- 1 x Valve Block
- 1 x Harness
- 1 x Mounting Screws
- 1 x Instruction Sheet

MANIFOLD



Air Ride Suspension Valve Block Solenoid Valve 2 Port Direct Action + Air Pressure Gauge Dual Digital Display Blue

SKU:
SPECIFICATIONS:

ABCON2PKB

Air Ride Suspension Valve Block

- Item Type: Manifold valve block
- Material: alloy
- Color: As pictures shown
- Total Power: 12.6W
- Working Voltage: 12V
- Minimum Open Voltage: 8V
- Grade of Coil Insulation: H/180 C
- Ambient Temperature: -40°C - +85°C
- Test of Fatigue Life: 10 million times
- Vibration Resistance: 10g/500HZ
- Working Pressure: 0-200 psi
- IN PORT: tank air pressure in port 1/4 NPT x 2 (if only 1 required blank the 2nd)
- OUT PORT: EXHAUST PORT OUT 1/4 NPT x 2 (if only 1 required blank the 2nd)
- Gauge Pressure Sensor Ports: 2 x 1/8 NPT
- Airbag Ports: 2 x 1/4 NPT

Air Pressure Gauge Dual Digital Display

- Voltage: DC12V-24V
- Diameter Size: 2" (52mm)
- Material: Aluminum Alloy & Plastic
- Current: IGN Maximum 0.3A ILM 0.3A
- Color: Black
- Light Color: Blue
- Unit: PSI
- Display range: 0-200 psi
- Electronic Sensors: 1/8NPT
- Sensor three core wire:**
Red-sensor 5V input
Black-sensor GND input
Yellow-sensor signal output
- Power supply two core wire:**
Red-positive pole (ACC)
Black-negative pole (grounding)



Air Ride Suspension Valve Block Solenoid Valve 2 Port Direct Action + Air Pressure Gauge Dual Digital Display Red

SKU:

ABCON2PKR

SPECIFICATIONS:

Air Ride Suspension Valve Block

- Item Type: Manifold valve block
- Material: alloy
- Color: As pictures shown
- Total Power: 12.6W
- Working Voltage: 12V
- Minimum Open Voltage: 8V
- Grade of Coil Insulation: H/180 C
- Ambient Temperature: -40°C - +85°C
- Test of Fatigue Life: 10 million times
- Vibration Resistance: 10g/500HZ
- Working Pressure: 0-200 psi
- IN PORT: tank air pressure in port 1/4 NPT x 2 (if only 1 required blank the 2nd)
- OUT PORT: EXHAUST PORT OUT 1/4 NPT x 2 (if only 1 required blank the 2nd)
- Gauge Pressure Sensor Ports: 2 x 1/8 NPT
- Airbag Ports: 2 x 1/4 NPT

Air Pressure Gauge Dual Digital Display

- Voltage: DC12V-24V
- Diameter Size: 2" (52mm)
- Material: Aluminum Alloy & Plastic
- Current: IGN Maximum 0.3A ILM 0.3A
- Color: Black
- Light Color: Red
- Unit: PSI
- Display range: 0-200 psi
- Electronic Sensors: 1/8NPT
- Sensor three core wire:**
Red-sensor 5V input
Black-sensor GND input
Yellow-sensor signal output
- Power supply two core wire:**
Red-positive pole (ACC)
Black-negative pole (grounding)

MANIFOLD



Air Ride Suspension Valve Block Solenoid Valve 4 Port Direct Action + 5 in 1 Air Pressure Gauge BLUE Digital Display

SKU:
SPECIFICATIONS:

ABCON4PKB

Air Ride Suspension Valve Block

- Item Type: Manifold valve block
- Material: alloy
- Color: As pictures shown
- Total Power: 12.6W
- Working Voltage: 12V
- Minimum Open Voltage: 8V
- Grade of Coil Insulation: H/180 C
- Ambient Temperature: -40°C - +85°C
- Test of Fatigue Life: 10 million times
- Vibration Resistance: 10g/500HZ
- Working Pressure: 0-200 psi
- IN PORT: tank air pressure in port 1/4 NPT x 2 (if only 1 required blank the 2nd)
- OUT PORT: EXHAUST PORT OUT 1/4 NPT x 2 (if only 1 required blank the 2nd)
- Gauge Pressure Sensor Ports: 4 x 1/8 NPT
- Airbag Ports: 4 x 1/4 NPT

Air Pressure Gauge Dual Digital Display

- Voltage: DC12V-24V
- Diameter Size: 2" (52mm)
- Material: Aluminum Alloy & Plastic
- Current: IGN Maximum 0.3A ILM 0.3A
- Color: Black
- Light Color: Blue
- Unit: PSI
- Display range: 0-200 psi
- Electronic Sensors: 1/8NPT
- Sensor three core wire:**
Red-sensor 5V input
Black-sensor GND input
Yellow-sensor signal output
- Power supply two core wire:**
Red-positive pole (ACC)
Black-negative pole (grounding)

TYRE INFLATOR / DEFLATOR

6 Litre Tyre Inflator Pro-Max Series Portable Air Tank Bead Seater Bead Blaster



SKU: FEATURES

- BTS06L
- Well-made non-slip handle
 - Equipped safety release valve, on/off ball valve
 - Great for car, off road vehicles, 4WD, SUV, small truck, beach car tyres etc.

SPECIFICATIONS

6 Litre Air Tank
Light Weight and Easy to Use
Max Pressure: 10 Bar (145psi)
Working Pressure: 6-8 bar (87-116psi)
Color: Black
Weight: 5.85kg

9 Litre Tyre Inflator Pro-Max Series Portable Air Tank Bead Seater Bead Blaster



SKU: FEATURES

- BTS09L
- Well-made non-slip handle
 - Equipped safety release valve, on/off ball valve
 - Great for car, off road vehicles, 4WD, SUV, small truck, beach car tyres etc.

SPECIFICATIONS

9 Litre Air Tank
Light Weight and Easy to Use
Max Pressure: 10 Bar (145psi)
Working Pressure: 6-8 bar (87-116psi)
Color: Black
Weight: 6.8kg

12 Litre Tyre Inflator Pro-Max Series Portable Air Tank Bead Seater Bead Blaster



SKU: FEATURES

- BTS12L
- Well-made non-slip handle
 - Equipped safety release valve, on/off ball valve
 - Great for car, off road vehicles, 4WD, SUV, small truck, beach car tyres etc.

SPECIFICATIONS

12 Litre Air Tank
Light Weight and Easy to Use
Max Pressure: 10 Bar (145psi)
Working Pressure: 6-8 bar (87-116psi)
Color: Black
Weight: 7.8kg

TYRE INFLATOR / DEFLATOR

Tyre Inflator / Deflator Kit

SKU: FEATURES

TDIK002

- Cast aluminum alloy body with valve Brass Chuck with Clip.
- Built in bleed for lowering pressure.
- Displays KGF, BAR, PSI, KPA measurement.
- Pistol grip control handle cast aluminum handle with valves.
- Portable size great to keep in car and simple to use.
- Perfect for most Car, Truck, Motorcycle and Bike.
- Unique deflation switch design, when the tire pressure is too high, press this switch to adjust to normal air pressure.
- Self-locking head, easy to connect.

SPECIFICATIONS

- Display mode: LCD digital display
- Measurement Accuracy: 0.14 Psi
- Measuring Range: 3-200 Psi
- Button function: open key (left), unit switch key (right)
- Static current: less than equal 5UA
- Material: Aluminum alloy + rubber + brass
- Battery Type: AAA battery (battery not included)

PACKAGE

1 x Tyre Inflator / Deflator Kit



TYRE INFLATOR / DEFLATOR

Tyre Inflator / Deflator / Air Blower Kit

SKU:
FEATURES



SPECIFICATIONS

TDIK003

- Cast aluminum alloy body with valve Brass Chuck with Clip.
- Built in bleed for lowering pressure.
- Displays KGF, BAR, PSI, KPA measurement.
- Pistol grip control handle cast aluminum handle with valves.
- Portable size great to keep in car and simple to use.
- Perfect for most Car, Truck, Motorcycle and Bike.
- Unique deflation switch design, when the tire pressure is too high, press this switch to adjust to normal air pressure.
- Self-locking head, easy to connect.

- Display mode: LCD digital display
- Measurement Accuracy: 0.14 Psi Measuring Range: 3-200 Psi
- Button function: open key (left), unit switch key (right)
- Static current: less than equal 5UA
- Material: Aluminum alloy + rubber + brass
- Battery Type: AAA battery (battery not included)

Air Blower

- Air Inlet: 1/4" NPT
- Max Pressure: 150 Psi
- 2-way air inlet connection
- Aluminum frame for durability
- Adjustable air control knob
- Long nozzle for hard to reach areas

PACKAGE

1 x Tyre Inflator / Deflator / Air blower Kit

TYRE INFLATOR / DEFLATOR

Tyre Inflator / Deflator / Coil Hose / Air Blower Kit

SKU: FEATURES



SPECIFICATIONS

TDIK004

- Cast aluminum alloy body with valve Brass Chuck with Clip.
- Built in bleed for lowering pressure.
- Displays KGF, BAR, PSI, KPA measurement.
- Pistol grip control handle cast aluminum handle with valves.
- Portable size great to keep in car and simple to use.
- Perfect for most Car, Truck, Motorcycle and Bike.
- Unique deflation switch design, when the tire pressure is too high, press this switch to adjust to normal air pressure.
- Self-locking head, easy to connect.

- Display mode: LCD digital display
- Measurement Accuracy: 0.14 Psi Measuring Range: 3-200 Psi
- Button function: open key (left), unit switch key (right)
- Static current: less than equal 5UA
- Material: Aluminum alloy + rubber + brass
- Battery Type: AAA battery (battery not included)

Air Blower

- Air Inlet: 1/4" NPT
- Max Pressure: 150 Psi
- 2-way air inlet connection
- Aluminum frame for durability
- Adjustable air control knob
- Long nozzle for hard to reach areas

PACKAGE

1 x Tyre Inflator / Deflator / Air blower / Coil Hose Kit

TYRE INFLATOR / DEFLATOR

Multi Tyre Inflator / Deflator Kit

SKU: FEATURES



TDIK212

- Unique quick connect and disconnect tyre valve connections
- Anti kink and anti tangle hoses
- Digital gauge display
- Quick disconnects for easy and compact storage of air hoses
- Air connections are standard 1/4 BSB Nitto used widely within Australia
- Large storage/carry bag for easy pack up and storage.
- Massive 8m length from gauge to end of connection on 4 hose kit and 4m length on 2 hose kit. Easily reaching all your car, van or trailer tyres
- Maximum psi accurate to 200psi
- Pressure Units Selectable PSI, BAR, kPa or kg/cm³
- Tyre Chucks - 2x Quick Connect suit standard Schrader valve stem
- Batteries - 2x AAA (not included)

PACKAGE

1 x Multi Tyre Inflator / Deflator Kit